



Manual guide

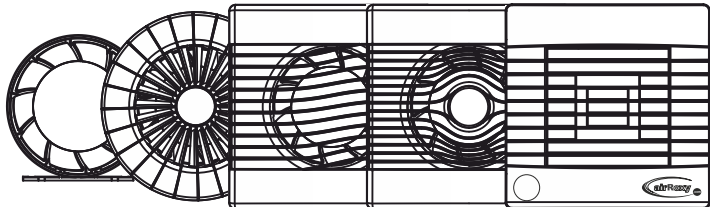

Dear Customer!
Thank you for choosing our product. We are sure that it will fulfil all your expectations. We wish you satisfaction from your choice of the fan and its usage.


Attention
Cut off the power supply in the electrical installation before the connection.

Useful tools

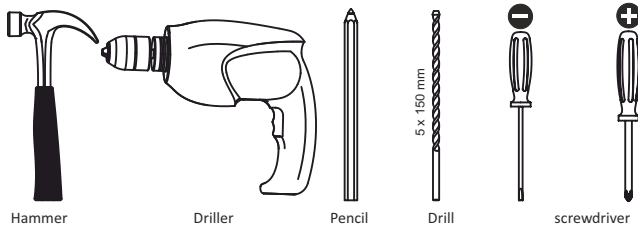


Hammer Driller Pencil Drill screwdriver

Content of the box aRid / pRim / pRemium / pRestige

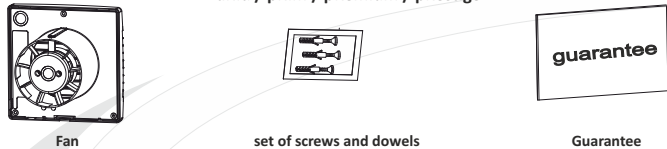


Fan set of screws and dowels Guarantee

Content of the box aRc

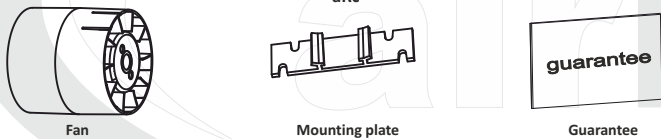


Fan Mounting plate Guarantee


Lid disassembly aRid S / aRc S

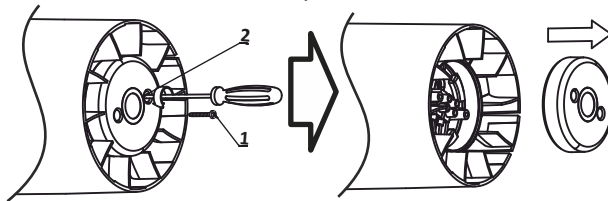

Przygotowanie otworu aRid / pRim / pRemium / pRestige

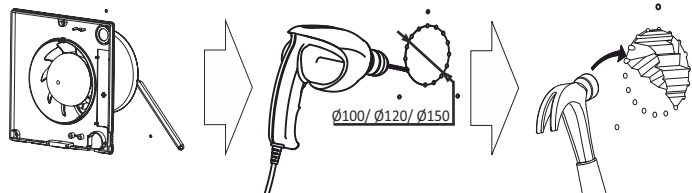


Fan installation aRid / pRim / pRemium / pRestige

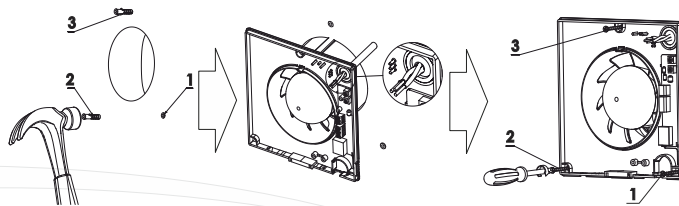

It is possible to set the fan operating time on potentiometer by using a screwdriver in fans with electrical control system (TS, HS and MS version).


- TS** Timer Sensor (The fan operates from 3 to 23 minutes after switching off the light)
- HS** Higr Sensor (The fan dries the room depending on chosen humidity level from 40% to 80% with precision+20%)
- MS** Movement Sensor (The fan turns on depending on chosen sensitivity degree. The sensor has the reach of 5m from the device)

Option TS/HS/MS

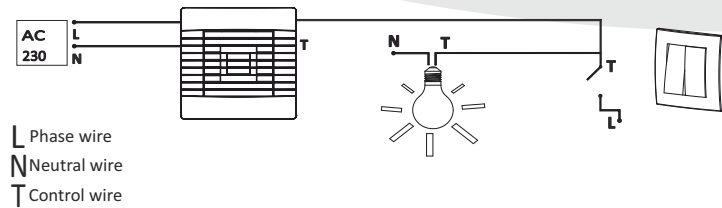


L Phase wire
N Neutral wire
T Control wire


Insert the wire and fasten it using the holder

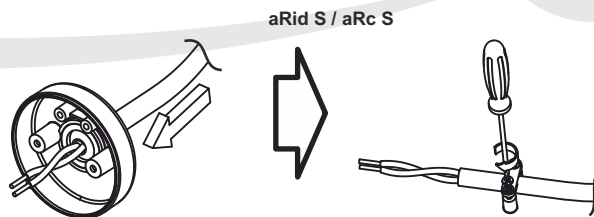


Electrical connection of S aRc / aRid / pRim / pRemium / pRestige

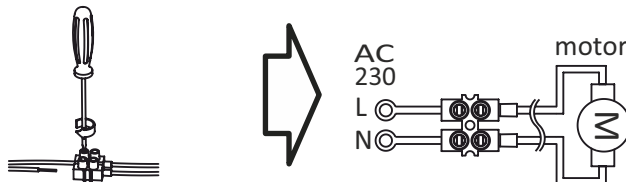


Electrical connection of TS, HS and MS version pRim / pRemium / pRestige

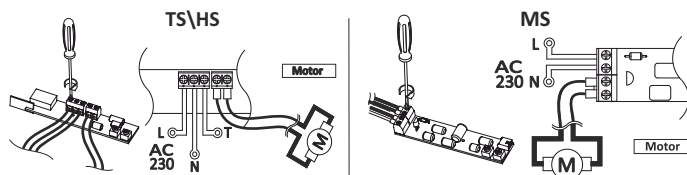


Grill disassembly aRid HS / aRid TS

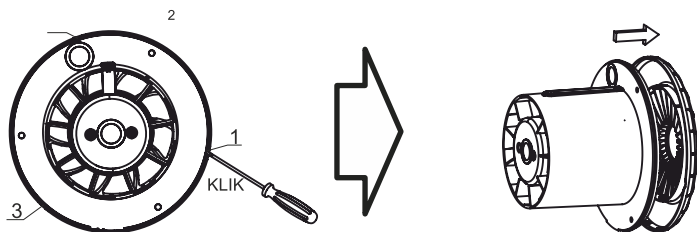


Grill disassembly pRim / pRemium / pRestige

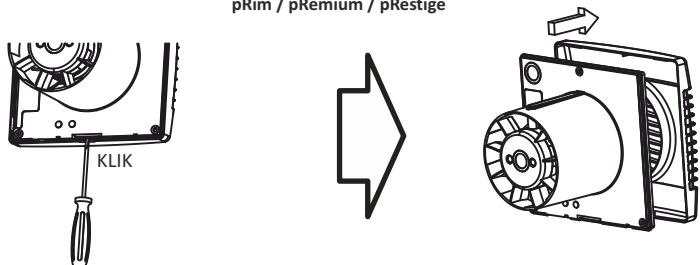


**Electrical connection of TS-HS
aRid**

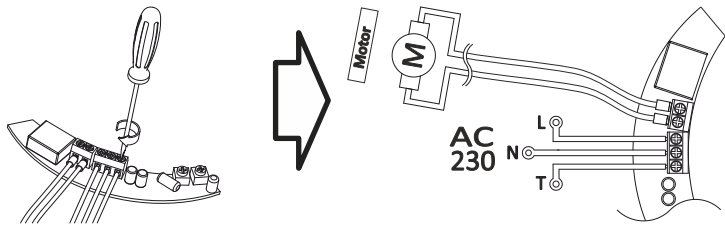


**Parameter adjustment in TS, HS and MS version
aRid / pRim / pRemium / pRestige**

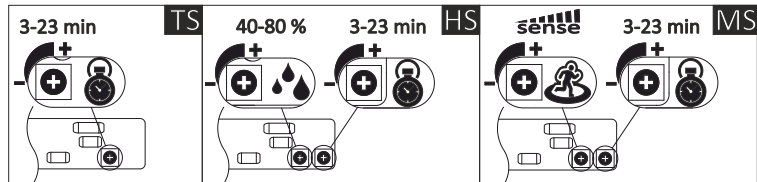


**Removal of the protective foams
pRestige**

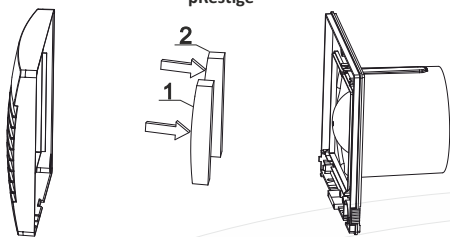


Grill assembly

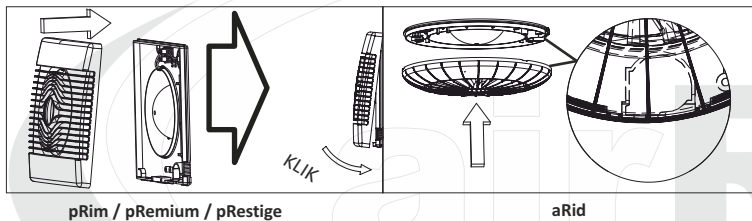

**Lid assembly after the fan installation
aRid S / aRc S**

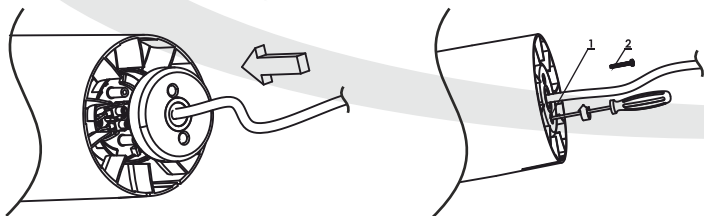

**Mounting plate assembly, duct fan assembly on the mounting
aRc**

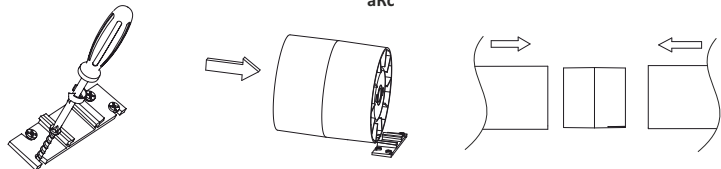

Maintenance and cleaning

Each fan should be cleaned regularly and at least once a year it should be disassembled in order to check the motor and clean the fan from the accumulated dust. The check includes cleaning, external inspection of the motor, start-up and protective device.

1. Cut off the power supply before cleaning the fan.
2. Use soap and damp cloth or sponge to clean the plastic parts.
3. After the cleaning process make sure that all the soap remains has been removed and the inside of the motor is free from liquids.
4. Before reassembling the fan make sure that all the parts are dry.

Remarks

1. All the precautions should be maintain during the installation
2. Assembling/Disassembling should be performed by a qualified and certified electrician
3. Regulation and maintenance operations should be performed only after the previous disconnection of the fan from the power supply, even if the fan isn't working.
4. The electrical installation requires a switch with minimum 3mm distance between the contacts of all poles.
5. All the precautions should be undertaken to avoid the invers flow of gases to a room from an open chimney hole or other devices with the open fire.
6. The producer reserves the rights to introduce the innovations and alterations resulting from the technological development.

Attention

After the operating period the device should be utilised in accordance with selective disposal of electrical and electronic equipment waste



Warranty terms and conditions

The guarantee is binding for 3 years from the date of purchase after showing the receipt. Any imperfections or technical defects will be removed or the device will be replaced by a new one in the period of 21 days from date of delivery of the damaged device into the service authorities. The guarantee does not include the treatment of device which has visible defect at the moment of purchase, or if the defect results from inappropriate usage, storing and maintaining as well as mechanical damages



Guarantee no: _____

Date of report	Date of repair	Scope of repair	Signature
Model Serial number: Date of sale: Receipt number: sellers stamp		date Service stamp	

3 year guarantee



airRoxy Sp. z o.o.
 ul. Graniczna 40
 44 - 178 Przystowice
 tel.: +48 32 239 42 00
 e-mail: office@airRoxy.com
 www.airRoxy.com